



Previous Name: Shell Vitrea M

Shell Morlina S1 B 320

- *Reliable Protection*
- *Industrial Application*
- *Water Shedding*

Industrial Bearing & Circulating Oils

Shell Morlina S1 B oils are high performance oils designed to provide excellent protection for most industrial bearing and circulating oil system applications, particularly those processes where water shedding (demulsification) is important for the life of the equipment. Meets the most basic requirements of the Morgan standard for common bearing oils.

DESIGNED TO MEET CHALLENGES

Performance, Features & Benefits

- **Good oil life – Maintenance saving**
Shell Morlina S1 B oils use carefully chosen components to help provide consistent performance and protection throughout the maintenance interval.
- **Reliable wear & corrosion protection**
Shell Morlina S1 B oils help prolong the life of bearings and circulating systems through:
 - Good water separation characteristics that help ensure that critical oil films are retained between highly loaded parts.
 - Good air release characteristics to minimize cavitation and associated damage to circulating pumps.
 - Helps protect against corrosion, even in the presence of water.
- **Maintaining system efficiency**
Shell Morlina S1 B oils are blended with high quality, solvent refined base oils that promote good water separation and air release to ensure the efficient lubrication of the machines and systems.

- **Oil lubricated bearings**
Suitable for most plain and rolling element bearings in general industrial applications.
- **Roll-neck bearings**
- **Enclosed industrial gear systems**
Low or moderately loaded enclosed gears where EP performance is not required.

Specifications, Approvals & Recommendations

- Morgan MORGOL® Lubricant Specification (New Oil Rev. 1.1) (MORGOL is a registered trademark of the Morgan Construction Company)
- **Shell Morlina S1 B Oils meet or exceed the requirements of the following standards:**
DIN 51517-1 – Oil Type C

For a full listing of equipment approvals and recommendations, please consult your local Shell Technical Helpdesk, or the OEM Approvals website.

Compatibility & Miscibility

- **Paint Compatibility**
Shell Morlina S1 B oils are compatible with seal materials and paints normally specified for use with mineral oils.

Main Applications



- **Machine circulation systems**

Typical Physical Characteristics

Properties		Method	Morlina S1 B 320	
ISO Viscosity Grade		ISO 3448	320	
Kinematic Viscosity	@40°C	mm ² /s	ASTM D445	320
Kinematic Viscosity	@100°C	mm ² /s	ASTM D445	24.6
Density	@15°C	kg/m ³	ISO 12185	891
Viscosity Index		ISO 2909	95	

Properties		Method	Morlina S1 B 320
Flash Point (COC)	°C	ISO 2592	255
Pour Point	°C	ISO 3016	-6
Rust, Distilled Water		ASTM D665A	Pass
Emulsion Test, Minutes	@82°C	ASTM D1401	30

These characteristics are typical of current production. Whilst future production will conform to Shell's specification, variations in these characteristics may occur.


Health, Safety & Environment

- Guidance on Health and Safety is available on the appropriate Material Safety Data Sheet, which can be obtained from <http://www.epc.shell.com/>
- **Protect the Environment**
Take used oil to an authorised collection point. Do not discharge into drains, soil or water.

Additional Information

- **Advice**
Advice on applications not covered here may be obtained from your Shell representative.

Viscosity - Temperature Diagram for Shell Morlina S1 B

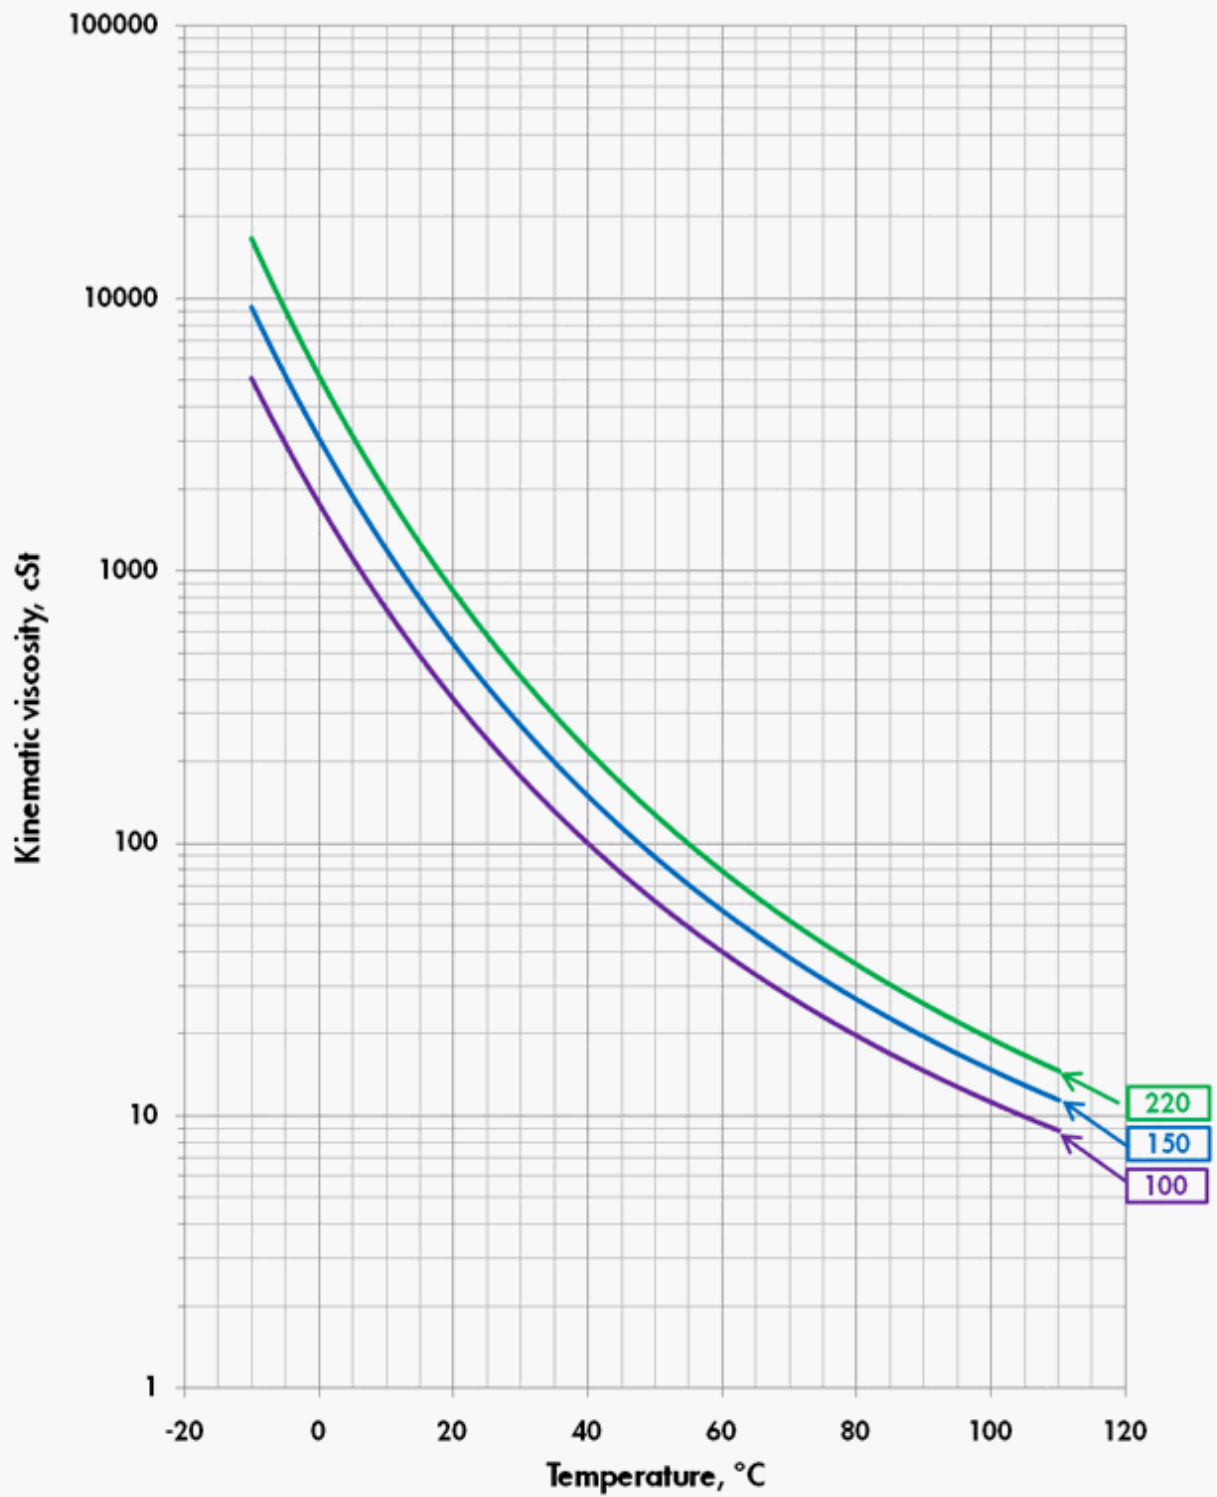

Viscosity - Temperature Diagram for Shell Morlina S1 B

